


FIRE HYDRANT

Model BS750 Type II - DN80



Note:

1. Produced in accordance with the British National Water Council requirement.
2. The inlet flange is DN80 drilled to combination range, including PN10, PN16 and ANSI 125#.
3. The outlet is 2-1/2"
4. Hydrostatic Test:
Body - 24 bar, Seat - 16 Bar
5. Weight - approximately 21 kgs.

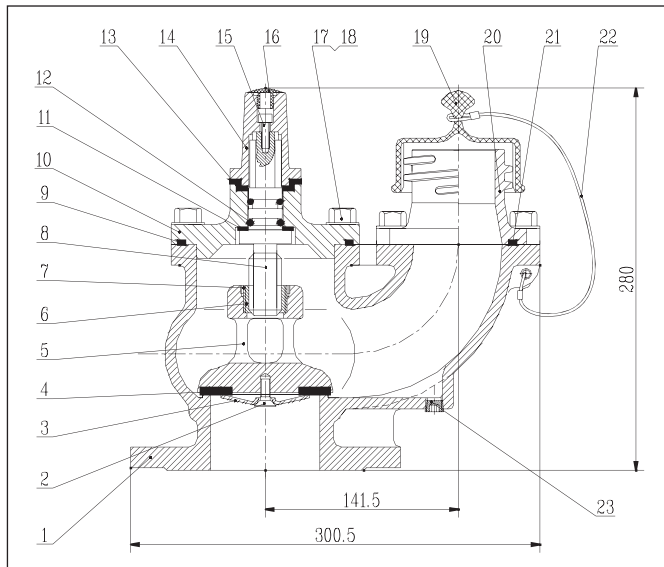

MATERIALS		
No.	Part Name	Material
1	Body	D.I. ASTM A536 65-45-12
2	Bolt	Stainless Steel 304
3	Holder	Stainless Steel 304
4	Gasket	NBR
5	Disc	D.I. ASTM A536 65-45-12
6	Stem Nut	Bronze ASTM B16 C36000
7	Screw	Steel
8	Stem	Stainless Steel 420
9	O-ring	NBR
10	Cover	D.I. ASTM A536 65-45-12
11	Washer	Copper
12	O-ring	NBR
13	Cap Gasket	Plastic
14	Driver Cap	C.I. ASTM A126 Class B
15	Bolt	Stainless Steel
16	Indicator Cap	Plastic
17	Bolt	Stainless Steel
18	Washer	Stainless Steel
19	Dust Cap	Plastic
20	Outlet	Brass ASTM B16
21	O-ring	NBR
22	Rope	Stainless Steel
23	Plug	Plastic

Design and materials are subject to change without notice.

OUTLET TYPES
 London Round Thread
 Belfast
 Instantaneous
 Bayonet



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.



United Water Products
 5355 Ramona Blvd., Jacksonville, FL 32205
 TEL. 877-766-4459 FAX: 877-766-4458
 Website: www.unitedwaterproducts.com