

MODEL 6500

Ultra-Lok Gland



DESCRIPTION


- High Strength ductile iron mechanical joint gland conforming to ANSI/AWWA C111/A21.11
- Hardened ductile iron restraint torque-off bolts
- Wedges have breakaway heads to ensure proper torque values
- For use on water and wastewater ductile pipelines to ANSI/AWWA C151/A21.51
- Rated at 350 psi with a 2:1 safety factor
- Sizes up to 24" available upon request

Material List


NO.	DESCRIPTION	ASTM SPEC.
1	Gland	Ductile Iron ASTM A536 65-45-12
2	Torque-Off Bolt	Ductile Iron ASTM A536 65-45-12
3	Wedge	Ductile Iron ASTM A536 65-45-12
4	Rubber Spacer	Rubber

Design, dimensions, and materials are subject to change without notice.


4" Gland

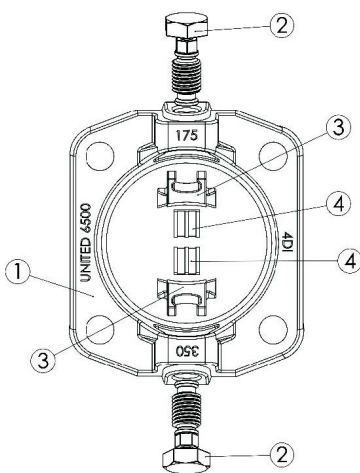

6-8" Gland

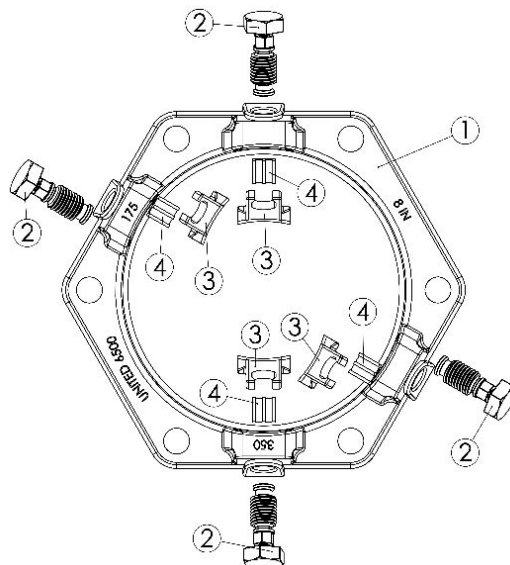

10-12" Gland

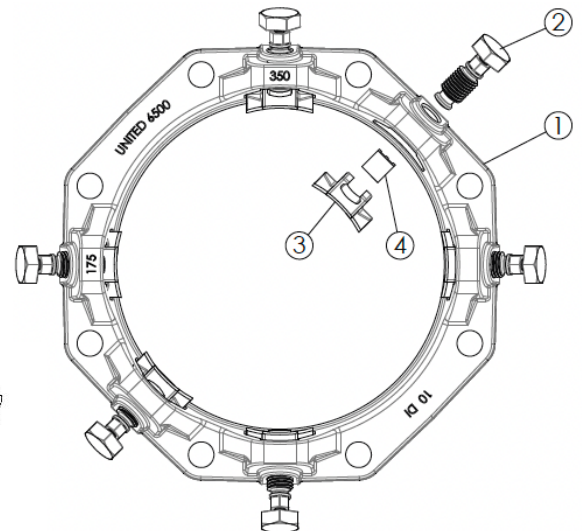

MODEL 6500 | Ultra-Lok Gland

Ductile Iron Ultra-Lok Glands

SIZE (DN)	PART NO.	PIPE OD (inches)	PRESSURE RATING	APPROX. WEIGHT	PIPE COMPATABILITY	ACCESSORIES INCLUDED
4"	6500-04-D-ACC	4.80	350 psi	8	DIP	Yes
6"	6500-06-D-ACC	6.90	350 psi	12	DIP	Yes
8"	6500-08-D-ACC	9.05	350 psi	16	DIP	Yes
10"	6500-10-D-ACC	11.10	350 psi	24	DIP	Yes
12"	6500-12-D-ACC	13.20	350 psi	32	DIP	Yes

PVC Ultra-Lok Glands

SIZE (DN)	PART NO.	PIPE OD (inches)	PRESSURE RATING	APPROX. WEIGHT	PIPE COMPATABILITY	ACCESSORIES INCLUDED
4"	6500-04-PVC-ACC	4.80	350 psi	8	PVC	Yes
6"	6500-06-PVC-ACC	6.90	350 psi	12	PVC	Yes
8"	6500-08-PVC-ACC	9.05	350 psi	16	PVC	Yes
10"	6500-10-PVC-ACC	11.10	350 psi	24	PVC	Yes
12"	6500-12-PVC-ACC	13.20	350 psi	32	PVC	Yes